




**ANYTHING ELECTRONIC (NZ) LTD.**

## 24 TO 12 VOLTAGE REDUCER

Part No: VR24-3

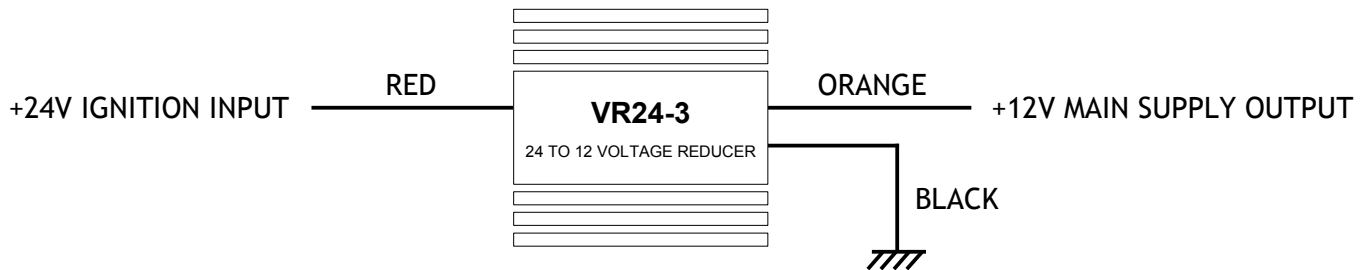

### **INSTRUCTIONS**

Mount the reducer in an open area to allow airflow for cooling; important for high current operation. The reducer should be mounted with the black earth lead connected to battery earth or a good chassis earthing point. Keep the output wiring shortest to minimize wiring voltage drop.

### **NOTE: Under no circumstances should:**

- a) A full positive feed be applied to any connection other than the RED input lead.
- b) The BLACK earth wire be removed while the unit is connected to the 24V supplies and the 12V equipment.
- c) The reducer fitted to any other than a negative (-) earth vehicle.

Failure to observe the note above will result in catastrophic damage to the reducer and/or the 12V equipment connected, invalidating the guarantee.

### **SPECS:**

CURRENT - 3A cont. 4A peak only

INPUT VOLTAGE - 30V max. 18V min.

OUTPUT VOLTAGE - 12V nom.

OUTPUT OVER VOLTAGE, OVER TEMPERATURE AND SHORT CIRCUIT PROTECTED.

Warranty statement on reverse.

**ANYTHING ELECTRONIC (NZ) LTD.**

7 Bullen Street, PO Box 273, Nelson, New Zealand

Phone : 03 548 5336 - Fax : 03 548 5636

Email : sales@anythingelectronic.co.nz