




ANYTHING ELECTRONIC (NZ) LTD.

REV-RITE LIMITER

Part No: SD304

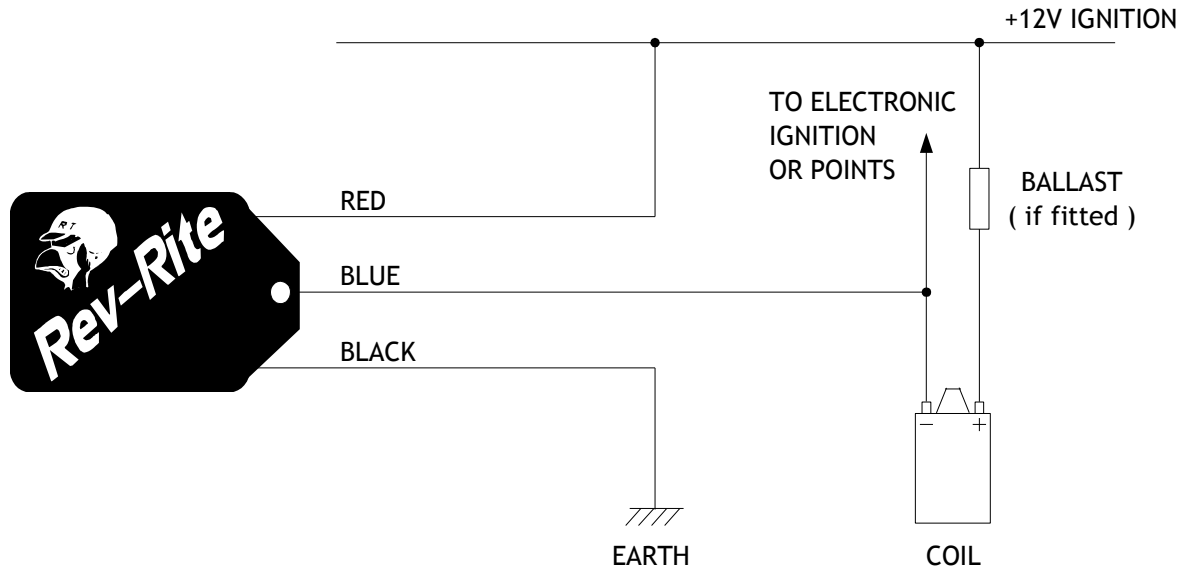

INSTRUCTIONS

Wire the SD304 to the coil, 12V ignition and earth as shown above. Using a rev counter for reference, run the engine and adjust the setting control on the side of the unit for the correct limit setting.

NOTE: The 12V supply to the limiter must be present during cranking.

The limiter disables firing of one or more cylinders to maintain engine revs at the pre-set limit. The limiter reduces the firing randomly over the cylinders and does not shut the ignition down completely. This enables quick recovery and reduces backfiring.

# CYLINDERS	ADJUSTABLE RPM RANGE
FOUR	4,000 – 16,000
SIX	2,500 – 10,000
EIGHT	2,000 – 8,000

Warranty statement on reverse

ANYTHING ELECTRONIC (NZ) LTD.

7 Bullen Street, PO Box 273, Nelson, New Zealand

Phone : 03 548 5336 - Fax : 03 548 5636

Email : sales@anythingelectronic.co.nz